


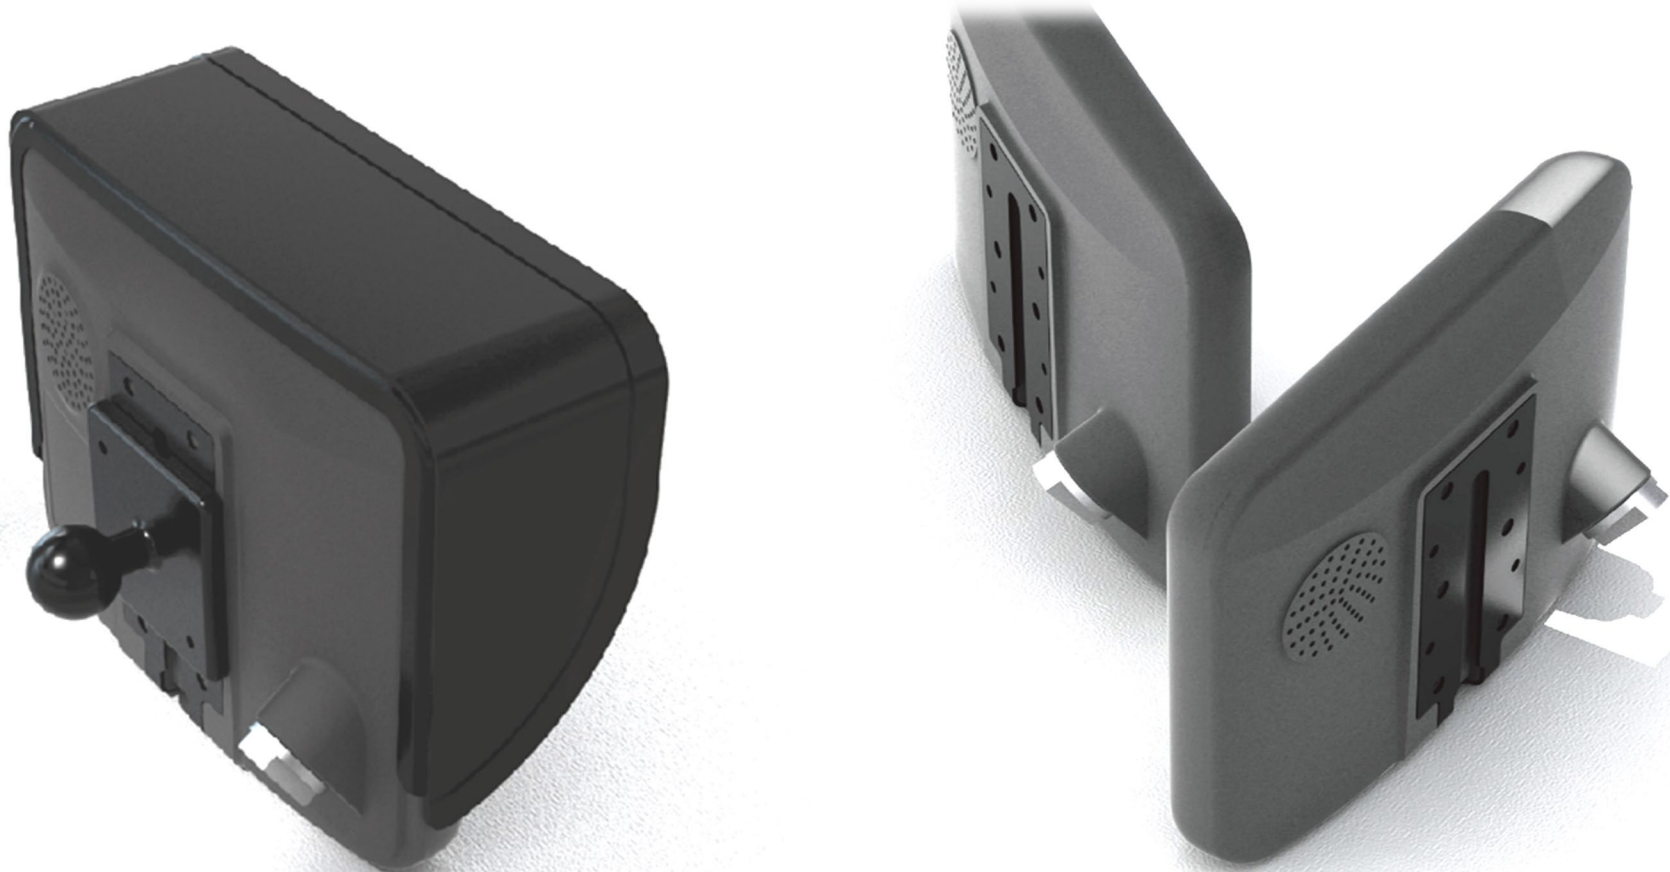

FEATURES

- High Resolution **7" Digital** TFT LCD
- LED Backlight technology (450cd/m2)
- **Heavy Duty (Robust)** Die-casting metal Housing
- **Shutter camera support** & **camera heater support**
- Water Resistant (**IP69K rating**)
- Capacitive **Touch Key**
- **3 Camera Inputs**
- 3 Trigger Inputs
- Automatic Brightness Control
- Auto Scan function
- Auto Power ON/OFF
- CVBS (NTSC/PAL), AHD 720P/1080P, HD-TVI 720P/1080P signal Compatible
- Tamperproof function
- Built-in Speaker
- Electronic Distance Marker (Parking line)
- Free Input voltage (DC 12V ~ 30V)
- Bracket rails and **Heavy Duty mounting possibility**
- Speedswitch function via tacho signal (in case of frontview purpose)
- Sunvisor – included
- **All connections via one multi-cable (no external controlbox)**

Specifications

Power input	12V~30V DC
Power Consumption	12 Watt Max.
Video System	CVBS (NTSC/PAL), AHD 720P/1080P, HD-TVI 720P/1080P signal Compatible
Panel	7” Digital
Resolution	800 RGB(H) X 480(V)
Format	16:9 wide
Brightness	450cd/m2
Display Mode	Single
Camera Input (3CH)	Mini DIN 4P, 1Vp-p 75Ω
Operating Temperature	-25°C ~ 75°C
Storage Temperature	-30°C ~ 85°C
Dimensions	190(W) X 142(D) X 42.85(H) mm
Weight	790g
O.S.D. control	Volume, Brightness, Color, Contrast, Tint, CAM Screen 1/2/3, CAM Trigger 1/2/3, Speedswitch, Auto Power, Distance Marker, Auto Picture Scan, Dimmer, Language, Direction, Reset